

Category 6A F/FTP EuroClass Cca Cables

Datasheet: GD103266v7




APPLICATION

Leviton Category 6A F/FTP cables exceed Category 6A performance standards. They are rated to 500MHz and are suitable for use in all Class E_A structured wiring cable systems. The applications supported include 10 Gigabit Ethernet, Gigabit Ethernet, Power over Ethernet, and broadband video transmissions at frequencies as high as 500MHz.

FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- Overall aluminum polyester screen – for improved shielding efficiency and increased heat dissipation
- Designed to support all Class E_A protocols including 10GBASE-T
- Enhanced HFFR-LS* material meets the requirements of the Construction Products Regulation (CPR) EuroClass Cca
- Green jacket to identify EuroClass level Cca
- Included in the Leviton Limited 25-Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors

**Halogen Free Flame Retardant – Low Smoke*

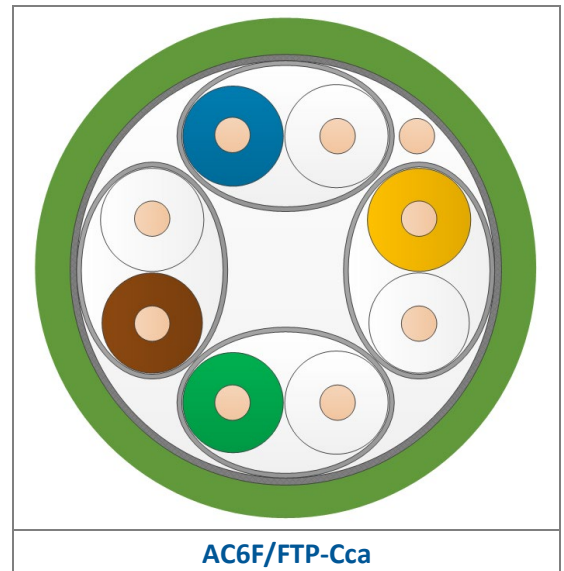

STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
 - ISO/IEC 11801 Class E_A, IEC 61156-5
 - EN50173-1 and EN 50288-10-1
 - ANSI/TIA 568.2-D
- Supports 10GBASE-T
- Meets the design requirements of 802.11ac wireless
- Recommended for PoE standards:
 - IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af
 - IEEE 802.3bt PoE Type 2 (30 Watts) formerly 802.3at
 - IEEE 802.3bt PoE Type 3 (60 Watts)
 - IEEE 802.3bt PoE Type 4 (90 Watts)
 - Cisco UPoE (60 Watts)
 - Cisco UPoE+ (90 Watts)
 - Power over HDBaseT™ PoH (95 Watts)

Category 6A F/FTP EuroClass Cca Cables

Datasheet: GD103266v7



REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC 60332-1-2	Pass
Bundled Cable Flame Rating	EN 50399 20.5kW source	Cca
Smoke Production	EN 50399 & EN61034-2	s1a
Flaming Droplets/Particles	EN 50399	d1
Acid Gas Emission/Acidity	EN 50267-2-3	a1
Classification / EuroClass	EN 13501-6	Cca s1a d1 a1

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω/100m	14Ω/100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1b	84dB
Transfer Impedance	Grade 2	11mΩ/m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	N/A	3.8	5.9	8.4	19.1	27.6	31.1	45.3	N/A
	Typical	1.9	3.5	5.5	7.8	18.0	26.1	29.4	43.0	45.4
NEXT (dB)	Standard	N/A	66.3	60.3	55.8	45.3	40.8	39.3	34.8	N/A
	Typical	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB)	Standard	N/A	63.3	57.3	52.8	42.3	37.8	36.3	31.8	N/A
	Typical	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ELFEXT (dB/100m)	Standard	N/A	56.0	48.0	42.0	28.0	22.0	20.0	14.0	N/A
	Typical	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSELFEXT (dB/100m)	Standard	N/A	53.0	45.0	39.0	25.0	19.0	17.0	11.0	N/A
	Typical	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return Loss (dB)	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	N/A
	Typical	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
PSANEXT (dB)	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	N/A
	Typical	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
PSAACR-F (dB)	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	N/A
	Typical	98.1	96.5	94.5	92.2	82.0	73.9	70.6	57.0	54.6

Category 6A F/FTP EuroClass Cca Cables

Datasheet: GD103266v7



INSTALLATION

Temperature (Installation)	0°C to +50°C
Temperature (Operation)	-20°C to +75°C
Max Tensile Load (Installation)	10kg
Segregation Class	Class D

Min Bend Radius (Installation)	8 x Outer Diameter
Min Bend Radius (Operation)	4 x Outer Diameter
Field Test NVP Value	0.80

STANDARD PACKAGING SPECIFICATIONS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Diameter x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6F/FTP-Cca-500GN	500	Green	7.0	50.2	400 x 390	27.5	12
AC6F/FTP-Cca-1000GN	1000	Green	7.0	50.2	600 x 325	55.9	6

COUNTRY OF ORIGIN

COO: United Kingdom

*“Leviton is **dedicated to designing, developing, and manufacturing** sustainable **high performance** structured cabling and specialty **cabling solutions**.”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.

Category 6A F/FTP EuroClass Dca Cables

Datasheet: GD103611v6




APPLICATION

Leviton Category 6A F/FTP cables exceed Category 6A performance standards. They are rated to 500MHz and are suitable for use in all Class E_A structured wiring cable systems. The applications supported include 10 Gigabit Ethernet, Gigabit Ethernet, Power over Ethernet, and broadband video transmissions at frequencies up to 500MHz.

FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- Overall aluminum polyester screen – for improved shielding efficiency and increased heat dissipation
- Designed to support all class E_A protocols including 10GBASE-T
- HFFR-LS* material enables the cable to meet the requirements of the Construction Products Regulation (CPR) EuroClass Dca
- Blue+ jacket to identify EuroClass level Dca
- Included in the Leviton Limited 25-Year System Warranties when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors

* Halogen Free Flame Retardant – Low Smoke

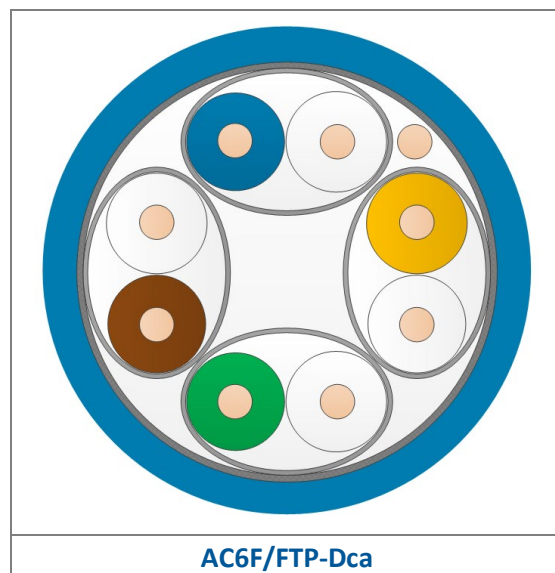

STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
 - ISO/IEC 11801 Class E_A, IEC 61156-5
 - EN50173-1 and EN 50288-10-1
 - ANSI/TIA 568.2-D
- Supports 10GBASE-T
- Meets the design requirements of 802.11ac wireless
- Recommended for PoE standards:
 - IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af
 - IEEE 802.3bt PoE Type 2 (30 Watts) formerly 802.3at
 - IEEE 802.3bt PoE Type 3 (60 Watts)
 - IEEE 802.3bt PoE Type 4 (90 Watts)
 - Cisco UPoE (60 Watts)
 - Cisco UPoE+ (90 Watts)
 - Power over HDBaseT™ PoH (95 Watts)

Category 6A F/FTP EuroClass Dca Cables

Datasheet: GD103611v6



REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING	DUPLEX RATING
Single Cable Flame Rating	IEC 60332-1-2	Pass	Pass
Smoke Production	EN 61034	N/A	Pass
Acid Gas Emission/Acidity	EN 50267-2-3	Pass	Pass
Classification / EuroClass	EN 13501-6	Dca s1 d2 a1	Dca s1a d1 a1

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω /100m	14 Ω /100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5G Ω .km	>50G Ω .km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100 Ω +/- 5 Ω @ 100MHz	100 Ω \pm 3 Ω @ 100MHz
Coupling Attenuation	Type 1b	84dB
Transfer Impedance	Grade 2	11m Ω /m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	N/A	3.8	5.9	8.4	19.1	27.6	31.1	45.3	N/A
	Typical	1.9	3.5	5.5	7.8	18.0	26.1	29.4	43.0	45.4
NEXT (dB)	Standard	N/A	66.3	60.3	55.8	45.3	40.8	39.3	34.8	N/A
	Typical	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB)	Standard	N/A	63.3	57.3	52.8	42.3	37.8	36.3	31.8	N/A
	Typical	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ELFEXT (dB/100m)	Standard	N/A	56.0	48.0	42.0	28.0	22.0	20.0	14.0	N/A
	Typical	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSELFEXT (dB/100m)	Standard	N/A	53.0	45.0	39.0	25.0	19.0	17.0	11.0	N/A
	Typical	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return Loss (dB)	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	N/A
	Typical	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
PSANEXT (dB)	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	N/A
	Typical	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
PSAACR-F (dB)	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	N/A
	Typical	98.1	96.5	94.5	92.2	82.0	73.9	70.6	57.0	54.6

Category 6A F/FTP EuroClass Dca Cables

Datasheet: GD103611v6



INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg per simplex cable	Field Test NVP Value	0.80
Segregation Class	Class D		

STANDARD PACKAGING SPECIFICATIONS

Part Number	Packaging Length (m)	Color	Nominal Cable Dimension (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Diameter x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6F/FTP-Dca-500BU	500	Blue†	7.1	50.4	465 x 390	27.7	12
AC6F/FTP-Dca-1000BU	1000	Blue†	7.1	50.4	600 x 325	56.4	6
AC6F/FTP-Dca-D500BU††	500	Blue†	7.1 x 14.4	100.9	600 x 325	56.9	6

†Also available in a range of non-standard colors

†† Duplex Cable

COUNTRY OF ORIGIN

COO: United Kingdom

*“Leviton is **dedicated** to **designing, developing, and manufacturing** sustainable **high performance** structured cabling and specialty **cabling solutions**.”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.

Category 6A U/FTP EuroClass Cca Cables

Datasheet: GD103175v8




APPLICATION

Leviton Category 6A U/FTP cables exceed Category 6A performance standards. They are specified to 500MHz and are suitable for use in all Class EA structured wiring cable systems. Category 6A U/FTP cable supports 10 Gigabit Ethernet, Gigabit Ethernet, Power over Ethernet, voice, and broadband video transmissions at frequencies up to 500MHz.

FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- Enhanced HFFR-LS* material enables the cable to meet the requirements of the Construction Products Regulation (CPR) EuroClass Cca
- Included in the Leviton Limited 25-Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors

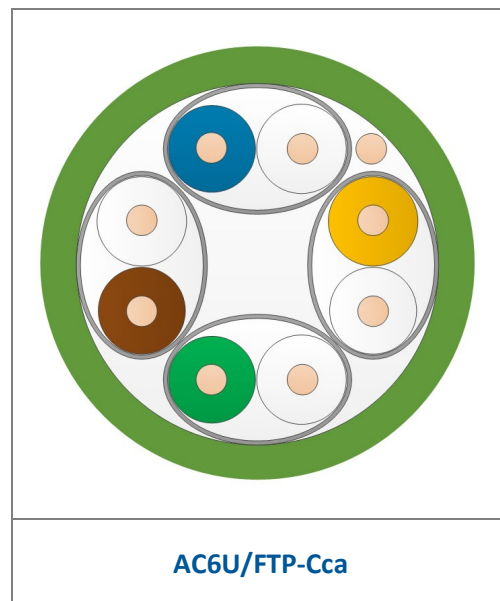

* Halogen Free Flame Retardant – Low Smoke

STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
 - ISO/IEC 11801 Class EA, IEC 61156-5
 - EN50173-1 and EN 50288-10-1
 - ANSI/TIA 568.2-D
- Supports 10GBASE-T
- Meets the design requirements of 802.11ac wireless
- Recommended for PoE standards:
 - IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af
 - IEEE 802.3bt PoE Type 2 (30 Watts) formerly 802.3at
 - IEEE 802.3bt PoE Type 3 (60 Watts)
 - IEEE 802.3bt PoE Type 4 (90 Watts)
 - Cisco UPoE (60 Watts)
 - Cisco UPoE+ (90 Watts)
 - Power over HDBaseT™ PoH (95 Watts)

Category 6A U/FTP EuroClass Cca Cables

Datasheet: GD103175v8



REACTION TO FIRE

CHARACTERISTIC	IEC STANDARD	EN STANDARD	CPR RATING
Classification / EuroClass	-	EN 13501-6	Cca s1a d1 a1
Single Cable Flame Rating	IEC 60332-1-2	EN 60332-1-2	Pass
Smoke Emission	IEC 61034	EN 61034	Pass
Acid Gas Emission	IEC 60754	EN 60754	Pass

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω /100m	14 Ω /100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5G Ω .km	>50G Ω .km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100 Ω +/- 5 Ω @ 100MHz	100 Ω \pm 3 Ω @ 100MHz
Coupling Attenuation	Type 1b	75dB
Transfer Impedance	Grade 2	28m Ω /m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	N/A	3.8	5.9	8.4	19.1	27.6	31.1	45.3	N/A
	Typical	1.9	3.5	5.5	7.8	18.0	26.1	29.4	43.0	45.4
NEXT (dB)	Standard	N/A	66.3	60.3	55.8	45.3	40.8	39.3	34.8	N/A
	Typical	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB)	Standard	N/A	63.3	57.3	52.8	42.3	37.8	36.3	31.8	N/A
	Typical	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ELFEXT (dB/100m)	Standard	N/A	56.0	48.0	42.0	28.0	22.0	20.0	14.0	N/A
	Typical	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSELFEXT (dB/100m)	Standard	N/A	53.0	45.0	39.0	25.0	19.0	17.0	11.0	N/A
	Typical	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return Loss (dB)	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	N/A
	Typical	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
PSANEXT (dB)	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	N/A
	Typical	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
PSAACR-F (dB)	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	N/A
	Typical	98.1	96.5	94.5	92.2	82.0	73.9	70.6	57.0	54.6

Category 6A U/FTP EuroClass Cca Cables

Datasheet: GD103175v8



INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg	Field Test NVP Value	0.80
Segregation Class	Class C		

STANDARD PACKAGING SPECIFICATIONS - REELS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Dia. x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6U/FTP-Cca-500GN	500	Green†	6.7	44.5	400 x 390	24.7	12
AC6U/FTP-Cca-1000GN	1000	Green†	6.7	44.5	600 x 325	50.5	6

STANDARD PACKAGING SPECIFICATIONS - BOXES

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Box Size L x W x H (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6U/FTP-Cca-305GN	305	Green†	6.7	44.5	475 x 295 x 475	14.6	12

†Also available in a range of non-standard colors

COUNTRY OF ORIGIN

COO: United Kingdom

*“Leviton is **dedicated to designing, developing, and manufacturing** sustainable **high performance** structured cabling and specialty **cabling solutions**.”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.


APPLICATION

Leviton Zone cables exceed the Category 6A performance standards in a channel of up to 70m in length. They are specified to 500MHz and are suitable for use in all Class E_A structured wiring cable systems. Zone cables have been designed specifically for the challenges in the data center environment by being smaller and lighter than equivalent conventional cables. Zone cables support 10 Gigabit Ethernet, Gigabit Ethernet, Power over Ethernet, voice, and broadband video transmissions at frequencies up to 500MHz.

FEATURES AND BENEFITS

- 26 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- HFFR-LS* jacket material to suit a variety of installation environments, including CPR fire performance ratings Eca, Dca, Cca and B2ca and color coded for identification
- Included in the Leviton Limited 25-Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors
- Designed and manufactured in a carbon neutral facility in the UK
- Delivered in 100% recyclable packaging

* Halogen Free Flame Retardant – Low Smoke

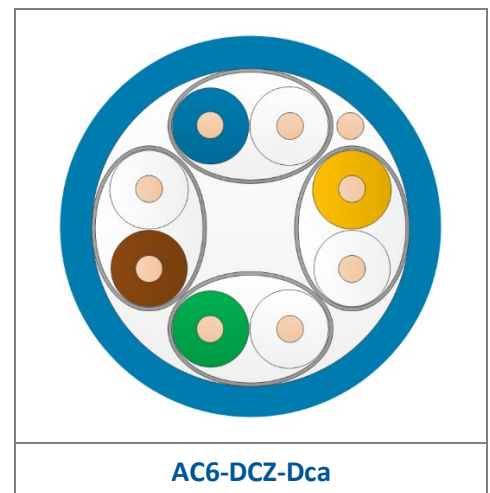

STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
 - ISO/IEC 11801 Class E_A, IEC 61156-6
 - EN50173-1 and EN 50288-10-2
- Supports 10GBASE-T
- Meets design requirements for 802.11ac wireless
- Recommended for PoE standards:
 - IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af
 - IEEE 802.3bt PoE Type 2 (30 Watts) formerly 802.3at
 - IEEE 802.3bt PoE Type 3 (60 Watts)
 - IEEE 802.3bt PoE Type 4 (90 Watts)
 - Cisco UPoE (60 Watts)
 - Cisco UPoE+ (90 Watts)
 - Power over HDBaseT™ PoH (95 Watts)

Category 6A U/FTP Zone EuroClass Dca Cables

Datasheet: GD103582v9



REACTION TO FIRE

CHARACTERISTIC	IEC STANDARD	EN STANDARD	CPR RATING
Classification / EuroClass	-	EN 13501-6	Dca s2 d1 a1
Single Cable Flame Rating	IEC 60332-1-2	EN 60332-1-2	Pass
Smoke Emission	-	EN 50399	s2
Acid Gas Emission	IEC 60754	EN 60754	Pass

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 28.5 Ω /100m	23 Ω /100m (<17 Ω /70m)
Conductor Resistance Unbalance	Max 2%	0.2%
Insulation Resistance	>5G Ω .km	>50G Ω .km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<537.6nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	3nsec/100m @ 100MHz
Mean Characteristic Impedance	100 Ω +/- 5 Ω @ 100MHz	100 Ω \pm 3 Ω @ 100MHz
Coupling Attenuation	Type 1b	77dB
Transfer Impedance	Grade 2	15m Ω /m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m) max	Standard	3.1	5.7	8.9	12.6	28.7	41.4	46.6	67.9	N/A
	Typical	2.4	4.4	6.8	9.7	22.0	31.7	35.7	52.0	54.8
NEXT (dB) min	Standard	N/A	66.3	60.3	55.8	45.3	40.8	39.3	34.8	N/A
	Typical	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB) min	Standard	N/A	63.3	57.3	52.8	42.3	37.8	36.3	31.8	N/A
	Typical	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ACR-F (dB) min	Standard	N/A	56.0	48.0	42.0	28.0	22.0	20.0	14.0	N/A
	Typical	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSACR-F (dB) min	Standard	N/A	53.0	45.0	39.0	25.0	19.0	17.0	11.0	N/A
	Typical	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return Loss (dB) min	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	N/A
	Typical	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
PSANEXT (dB) min	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	N/A
	Typical	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
PSAACR-F (dB) min	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	N/A
	Typical	98.1	96.5	94.5	92.2	82.0	73.9	70.6	57.0	54.6

Category 6A U/FTP Zone EuroClass Dca Cables

Datasheet: GD103582v9



INSTALLATION

Temperature (Installation)	0°C to +50°C
Temperature (Operation)	-20°C to +75°C
Max Tensile Load (Installation)	10kg
Segregation Class	Class C

Min Bend Radius (Installation)	8 x Outer Diameter
Min Bend Radius (Operation)	4 x Outer Diameter
Field Test NVP Value	0.80

NB: Network designers should use an attenuation factor of 1.3 when designing with these cables

STANDARD PACKAGING SPECIFICATIONS - REELS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Dia. x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6-DCZ-Dca-500BU	500	Blue†	5.6	32.6	400 x 315	18.3	18
AC6-DCZ-Dca-1000BU	1000	Blue†	5.6	32.6	465 x 390	35.6	6

STANDARD PACKAGING SPECIFICATIONS - BOXES

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Box Size L x W x H (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6-DCZ-Dca-Rlx-305BU§	305	Blue†	5.6	32.6	405 x 265 x 405	10.0	27 or 18††

§ = 305m box

† Also available in a range of non-standard colors

†† 3 Layer pallet is 27 boxes, 2 layers is 18

COUNTRY OF ORIGIN

COO: United Kingdom

*“Leviton is **dedicated to designing, developing, and manufacturing** sustainable **high performance** structured cabling and specialty **cabling solutions.**”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.